



MB931U-1VB R1




USB 3.2 Gen 2 (Type-C) to U.2 NVMe SSD Adapter



MB031U-1SMB



USB 3.2 Gen 1 (Type-C) to 2.5" SATA SSD/HDD & M.2 SATA SSD Adapter



MB104U-1SMB



USB 3.2 Gen 2 (Type-C) to 2.5" SATA SSD/HDD & M.2 NVMe/SATA SSD Adapter



Copyright © ICY DOCK International. All Rights Reserved. 650300 VER 1.0

1


Package Contents • Packungsinhalt • Contenu • Contenido del paquete • 包装について • 包装説明 • 包装说明



Device (MB931U-1VB R1)



Device (MB031U-1SMB)



Device (MB104U-1SMB)


	User Manual	USB Type C to A Cable	USB Type C to C Cable	Power Adapter
MB931U-1VB R1	✓	✓	✓	✓
MB031U-1SMB	✓	✓		
MB104U-1SMB	✓		✓	

2


Device Information • Geräteinformationen • Informations dispositif • Información del dispositivo • 本体説明 • 機體説明 • 机体说明

▼ Inner View


MB931U-1VB R1



MB031U-1SMB




MB104U-1SMB




- 1 Power Switch
- 2 LED Indicator (Device Power : Solid Blue ; Drive Access : Flashing Blue)
- 3 U.2 NVMe Connector
- 4 2.5" SATA Connector
- 5 M.2 SATA Connector
- 6 M.2 NVMe/SATA Connector

▼ Rear View

MB931U-1VB R1



MB031U-1SMB



MB104U-1SMB




- 1 DC 12V Power Connector
- 2 USB type C Connector

3


Installation Guide • Installationsanleitung • Guide d'Installation • Guía de instalación • 製品の組み込み手順について • 操作步驟 • 操作步驟

MB931U-1VB R1


1. Connect the USB cable and power adapter.

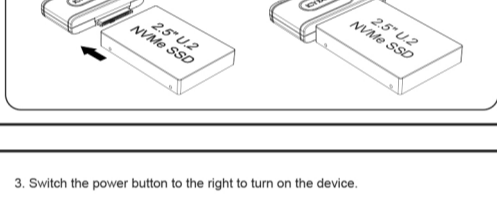

2. Connect U.2 NVMe SSD to the MB931U-1VB R1.

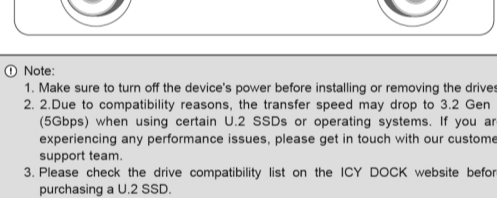

3. Switch the power button to the right to turn on the device.

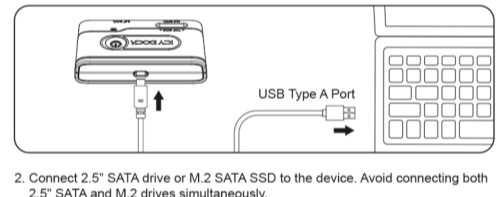


ⓘ Note:


- 1. Make sure to turn off the device's power before installing or removing the drives.
- 2. Due to compatibility reasons, the transfer speed may drop to 3.2 Gen 1 (5Gbps) when using certain U.2 SSDs or operating systems. If you are experiencing any performance issues, please get in touch with our customer support team.
- 3. Please check the drive compatibility list on the ICY DOCK website before purchasing a U.2 SSD.

MB031U-1SMB


1. Connect the USB cable.

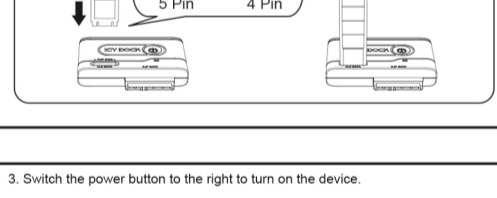


2. Connect 2.5" SATA drive or M.2 SATA SSD to the device. Avoid connecting both 2.5" SATA and M.2 drives simultaneously.

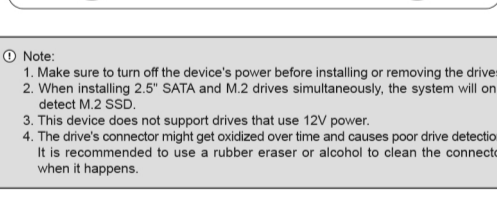

OR

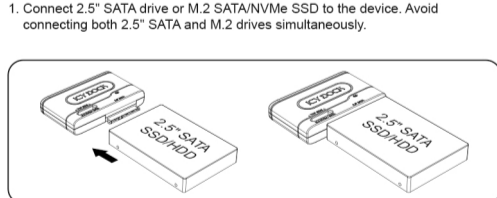

3. Switch the power button to the right to turn on the device.

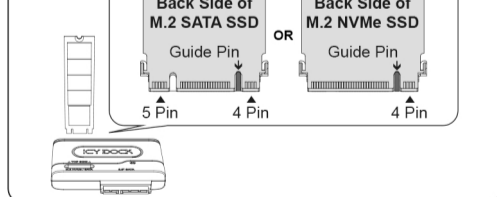


ⓘ Note:

- 1. Make sure to turn off the device's power before installing or removing the drives.
- 2. When installing 2.5" SATA and M.2 drives simultaneously, the system will only detect M.2 SSD.
- 3. This device does not support drives that use 12V power.
- 4. The drive's connector might get oxidized over time and causes poor drive detection. It is recommended to use a rubber eraser or alcohol to clean the connector when it happens.

MB104U-1SMB

1. Connect 2.5" SATA drive or M.2 SATA/NVMe SSD to the device. Avoid connecting both 2.5" SATA and M.2 drives simultaneously.

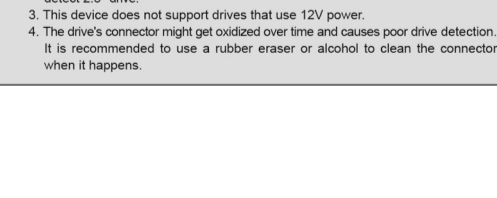

OR



2. Connect the USB cable.



ⓘ Note:

- 1. For M.2 NVMe SSD that does not support the hot-plug function, it is suggested to install the M.2 NVMe SSD before connecting the USB cable.
- 2. When installing 2.5" SATA and M.2 drives simultaneously, the system will only detect 2.5" drive.
- 3. This device does not support drives that use 12V power.
- 4. The drive's connector might get oxidized over time and causes poor drive detection. It is recommended to use a rubber eraser or alcohol to clean the connector when it happens.

